


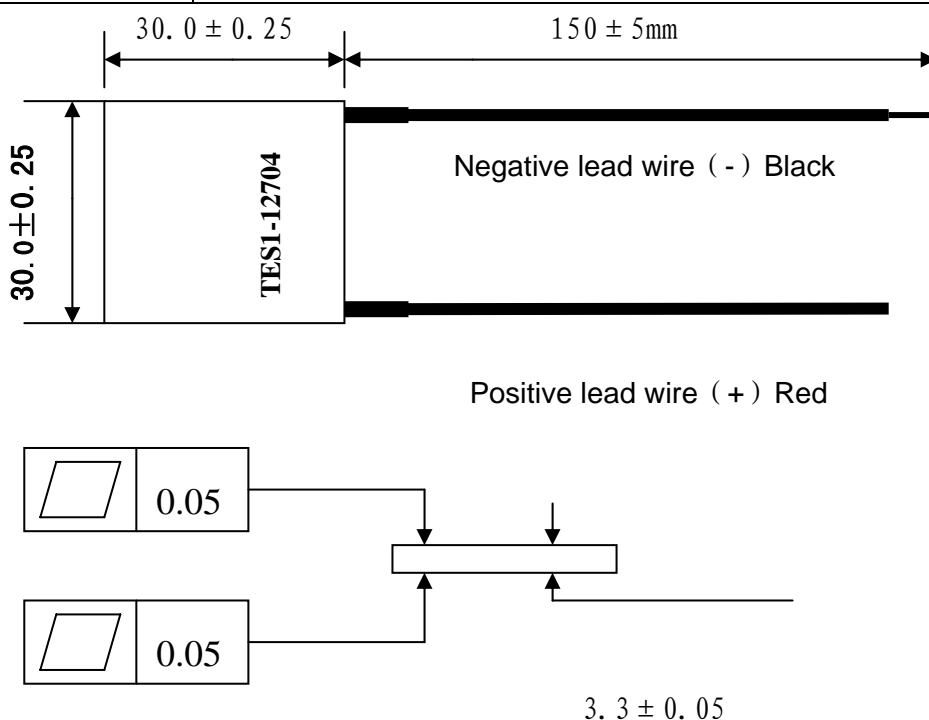

Item Number	TES1-12703
Wire	1. 20AWG UL 1674 PVC insulated 2. Standard 105℃ tinned copper wire 3. General length: 150±5mm 4. Length of tinning without outer sphere on the end of wire: 5±1.0mm
Resistance (ohms)	2.95-3.15 ohms (surrounding temperature 20 ℃ , 1KHZ vacuum state)
Packing	Foam box
Printing	Printing on the hot side

**Other Requirement:**

1. Working Temperature: -156℃to +80℃
2. Assembled overwhelm force: 15 lb / Sq.In
3. P/N Couples: 127 couples
4. I<sub>max</sub>: 3.5A (15.4VCD)
5. V<sub>max</sub>: 15.4VDC
6. Q<sub>cmax</sub>: 27W (15.4 DVC)
7. Resistance range: AC-R 2.95-3.15 Surrounding Temperature20℃ 1KHZ
8. T<sub>max</sub> ≥63℃, T<sub>max</sub>-66℃ (cooling capacity=0)
9. Wire should be soldered on the hot side
10. 20AWG UL, 1674 PVC insulated, Standard 105℃ tinned copper wire
11. Printing on the hot side: TES1-12703