



**HAHN - Elektrobau GmbH & Co. KG**

Bellersheimerstraße 45  
35410 Hungen  
Germany

phone: +49 (0) 6402/808-0  
fax: +49 (0) 6402/808-60  
email: info@hahn-trafo.de

**Data sheet: BV 202 0154**


Size 2 a: height 19 mm	Type BV 202...	0,50 VA
------------------------	----------------	---------

shipping unit per box: **50 pcs.** / temperature class: **ta 70/B** / weight: **approx. 35g**

- absolutely short circuit proof
- <b>excellent function at thermal changes, vacuum casted</b>
- maximum safety and long-term durability
- <b>with VDE-, ENEC 10-, UL-, and CSA certificates</b>
- minimum size, maximum capacity
- <b>self-extinguishing cast housing and sealing material</b>
- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV 202 0154	0,5	230	1-4	6 V 83 mA	6-7	10,2

**Certificates**

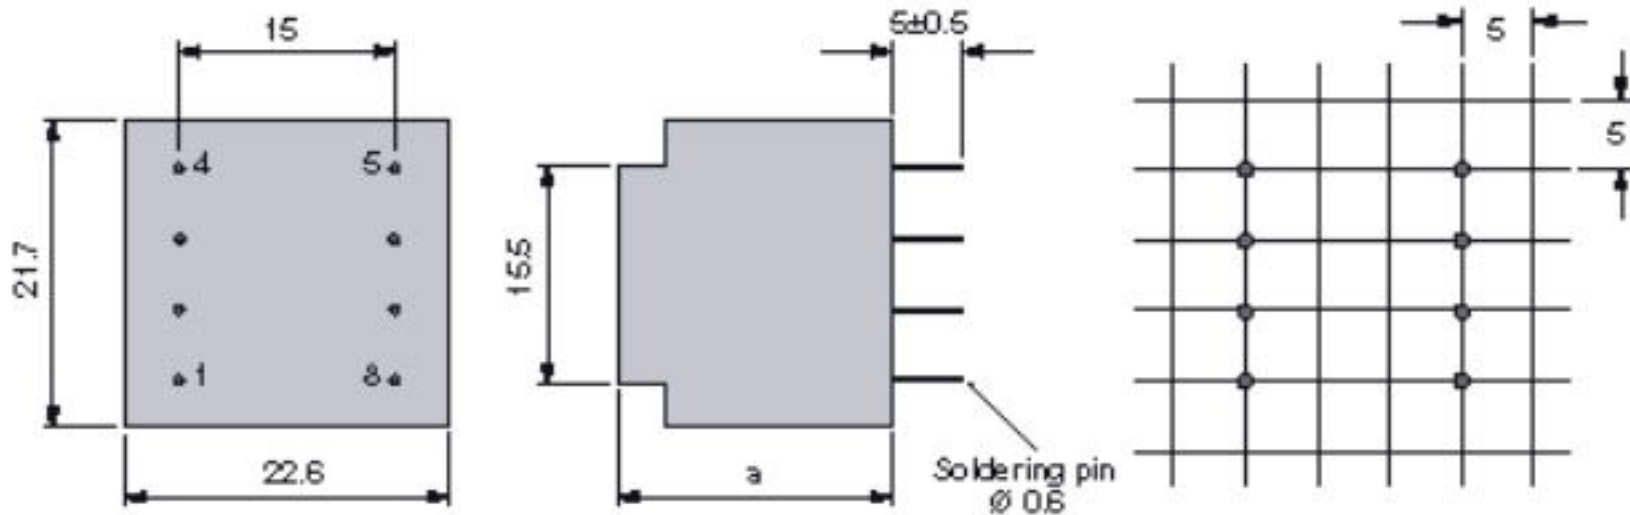

Dimensions with no indication of tolerances: ± 0,3 mm