



Data sheet: BV 202 0160


Size 2 a: height 19 mm	Type BV 202...	0,50 VA
------------------------	----------------	---------

shipping unit per box: **50 pcs.** / temperature class: **ta 70/B** / weight: **approx. 35g**

- absolutely short circuit proof
- excellent function at thermal changes, vacuum casted
- maximum safety and long-term durability
- with VDE-, ENEC 10-, UL-, and CSA certificates
- minimum size, maximum capacity
- self-extinguishing cast housing and sealing material
- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV 202 0160	0,5	230	1-4	2 x 12 V 21 mA	5-6/7-8	2 x 20,6

Certificates

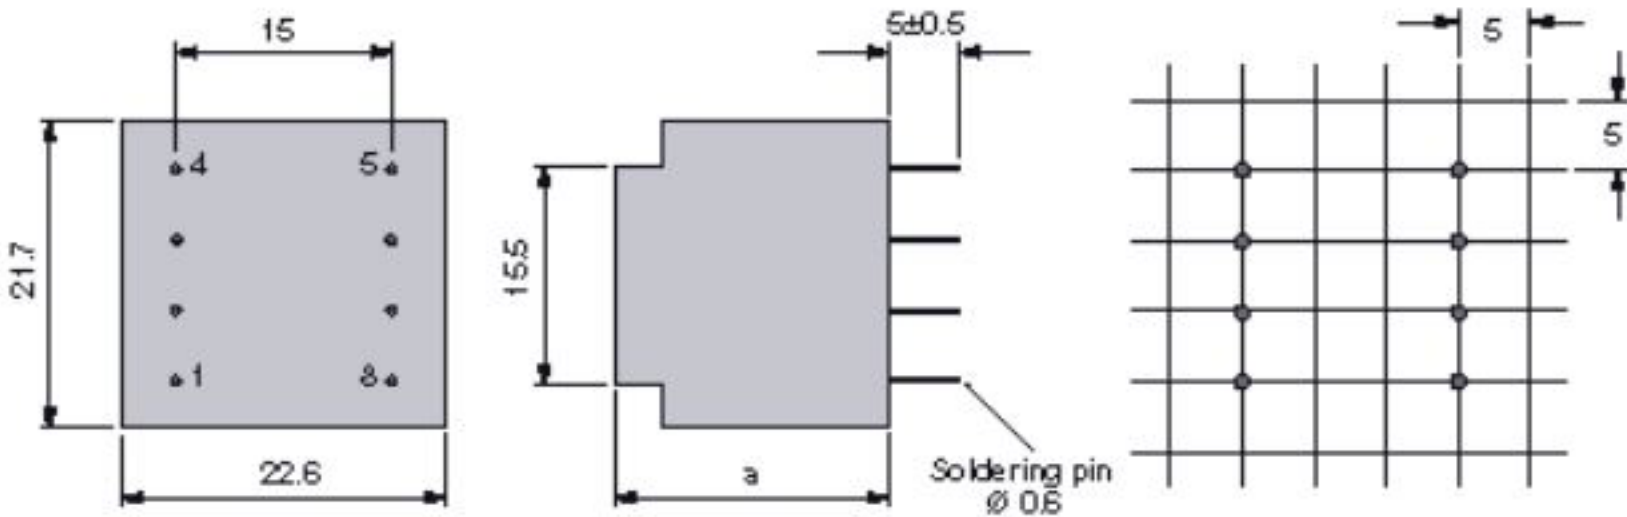

Dimensions with no indication of tolerances: ± 0,3 mm