



# HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45  
35410 Hungen  
Germany

phone: +49 (0) 6402/808-0  
fax: +49 (0) 6402/808-60  
email: info@hahn-trafo.de

## Data sheet: BV EI 422 1227

Frame size/Core height	Output (ta 70B)	h 1 (mm)	h 2 (mm)	weight kg
EI 422 .... / 14,8 mm	6 VA	26,4	32,3	0,200


- non short-circuit-proof at temperature class ta 70 °C/B
- excellent temperature fluctuation resistance properties
- Test certifications to ENEC 10-, VDE- and UL-regulations
  - maximum safety and long-term durability
  - minimum size, maximum capacity
  - self-extinguishing cast housing and sealing material
  - individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. $\pm 5\%$	Connecting pins	No-load voltage V $\pm 5\%$
EI 422 1227	6	230	1-5	2x15 V 200 mA	6-7/9-10	20,6/20,6

### Certificates



Type "K" cast housing with 2 fixing straps

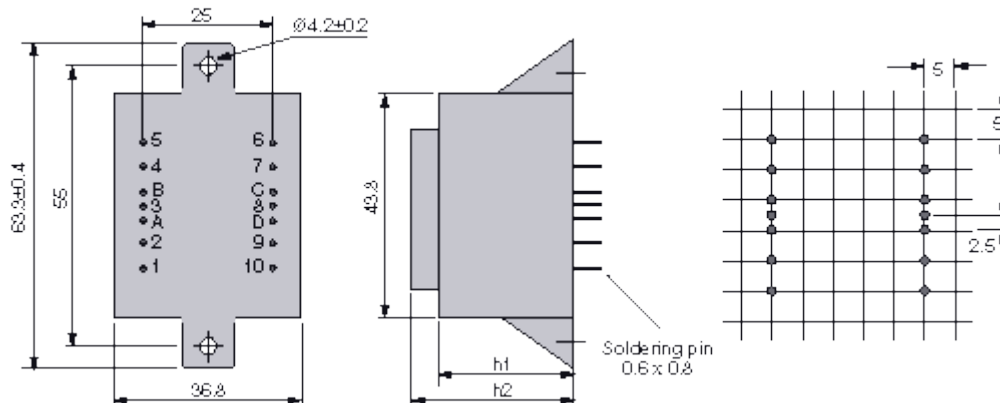

Dimensions of drawing without tolerances  $\pm 0,3$  mm. soldering pins 0,6 x 0,8 mm