



# HAHN - Elektrobau GmbH & Co. KG

Bellersheimerstraße 45  
35410 Hungen  
Germany

phone: +49 (0) 6402/808-0  
fax: +49 (0) 6402/808-60  
email: info@hahn-trafo.de

## Data sheet: BV EI 481 1119


Frame size/Core height	Output (ta 70B)	h 1 (mm)	h 2 (mm)	weight kg
EI 481 .... / 16,8 mm	10 VA	27,9 ± 0,5	34,6 ± 0,5	0,300

- Test certifications to ENEC 10- and VDE-regulations
- non short-circuit-proof at temperature class ta 70 °C/B
- type "K" cast housing with 2 fixing straps
- maximum safety and long-term durability
- excellent temperature fluctuation resistance properties
- minimum size, maximum capacity
- Self-extinguishing cast housing and sealing material
- individually tested with certificate

Article no. BV	Output ta 70°C/B	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
EI 481 1119	10	230	1-6	2 x 12V 417 mA	7-8/11-12	2 x 15.3

**Primary protection by means of transformer heat coils to IEC 127 Standards or secondarily with PTC resistances.**

### Certificates

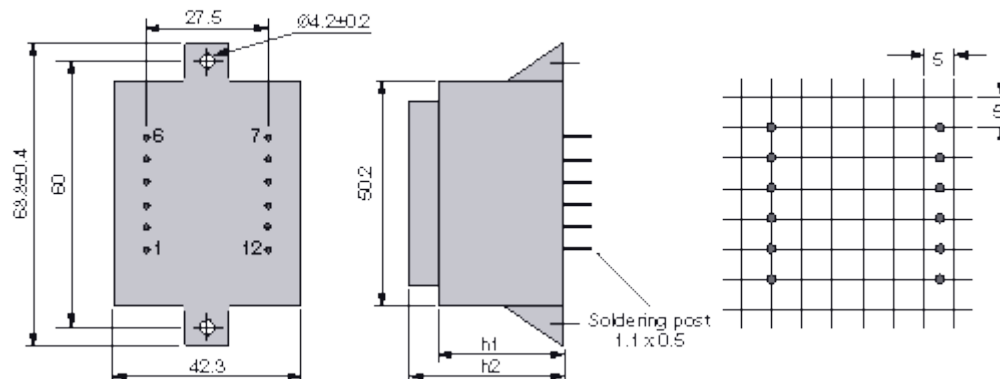

Dimensions of drawing without tolerances ± 0,3 mm.