



# 超小型波动开关 Sub-Miniature Rocker Switch SMRS Series




## 型号说明 Ordering Information

SMRS-101N-1C3-R/B

基座颜色 Base color  
盖帽颜色 Cap color  
盖帽标记 Cap marking  
产品序号 Product order  
氖灯 Neon lamp  
电路特性 Circuitry trait  
刀数 Poles  
超小型波动开关 Sub-Miniature Rocker Switch

### 盖帽标记 Cap marking

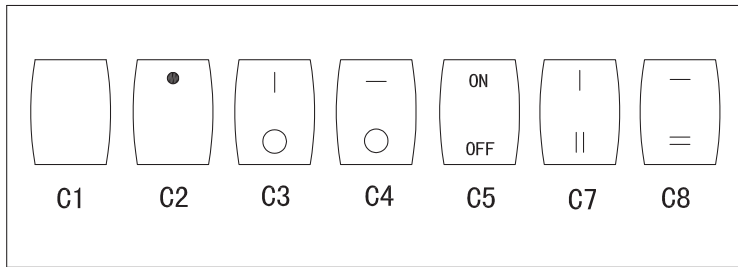

## 技术特性 Specification

- 1.规格 Rating:3A 125VAC;1A 250VAC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:10,000 Cycles

### 盖帽颜色 Cap color

黑 Black (B)  
白 White (W)  
红 Red (R)  
黄 Yellow (Y)  
绿 Green (G)  
蓝 Blue (BL)  
桔黄 Orange (O)  
灰 Gray (GR)



### 基座颜色 Base color

黑 Black (B)  
白 White (W)  
灰 Gray (GR)





**SMRS-101-1** ON-OFF

SPST 2P  
3A 125VAC; 1A 250VAC





**SMRS-102-1** ON-ON

SPDT 3P  
3A 125VAC; 1A 250VAC



**SMRS-101-2** ON-OFF

SPST 2P  
6A 125VAC; 3A 250VAC



**SMRS-101N-2** ON-OFF

SPST 3P (with neon lamp)

**SMRS-102-2** ON-ON

SPDT 3P  
6A 125VAC; 3A 250VAC

