
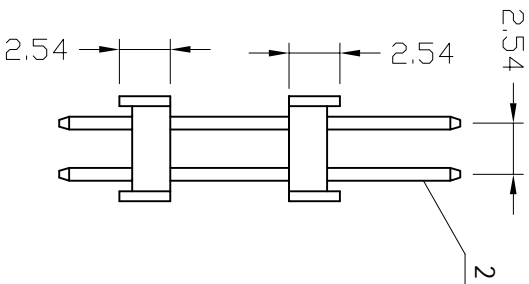
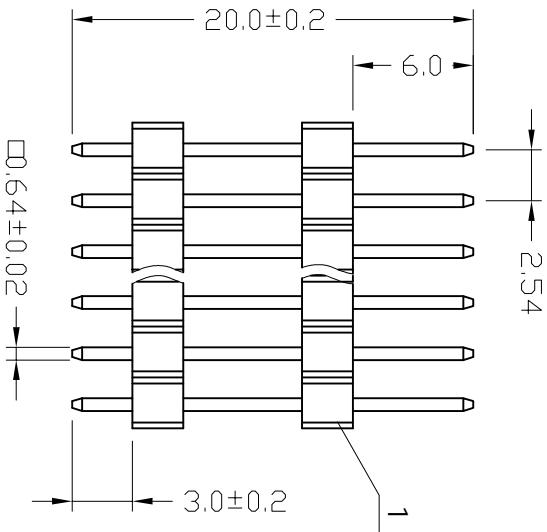


序号/RevNo.	名称/Title	文件编号/File No.
1	塑料件	QJ/XYT-11119
2	端子	QJ/XYT-11120

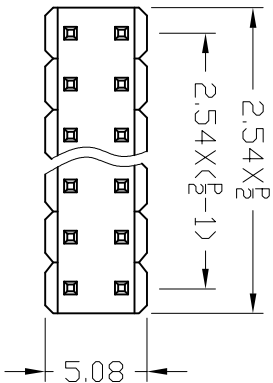

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 1 AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Brass
Housing: PA66

要求:

- 塑料件无裂痕。
- 整排端子成一直线，相邻端子之间相互平行。

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Draw ing by	审核/Checked by	批准/Approved by	未注公差 General Tol erance	
图名/Title		文件编号/File No.		x. ±0.2	x." ±2°
112-DSXXG		页序/Sheet		.x ±0.1	.x' ±1°
备注/Remark				.xx ±0.05	.xx' ±0.5°
				.xxx ±0.01	
XINYA ELECTRONIC CO., LTD				单位/Units: mm	