



SF31 - SF38

3.0 AMPS. Super Fast Rectifiers

DO-201AD


U

Features

- ✧ High efficiency, low VF
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability
- ✧ Low power loss.
- ✧ For use in low voltage, high frequency inverter, free wheeling, and polarity protection application

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Lead: Pure tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Weight: 1.2 grams

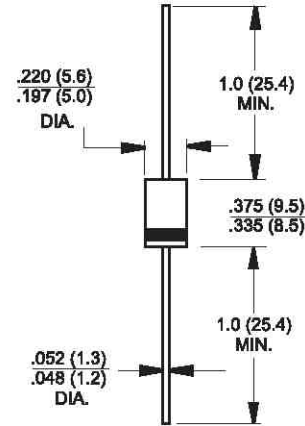

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| Type Number | Symbol | SF 31 | SF 32 | SF 33 | SF 34 | SF 35 | SF 36 | SF 37 | SF 38 | Units |
|--|-------------------|-------------|-------|-------|-------|-------|-------|-------|-------|----------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 150 | 200 | 300 | 400 | 500 | 600 | V |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 105 | 140 | 210 | 280 | 350 | 420 | V |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 150 | 200 | 300 | 400 | 500 | 600 | V |
| Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @T _A = 55 °C | I _(AV) | 3.0 | | | | | | | | A |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method) | I _{FSM} | 125 | | | | | | | | A |
| Maximum Instantaneous Forward Voltage @ 3.0A | V _F | 0.95 | | | | 1.3 | | 1.7 | | V |
| Maximum DC Reverse Current @ T _A =25 °C at Rated DC Blocking Voltage @ T _A =100 °C | I _R | 5.0 100 | | | | | | | | uA uA |
| Maximum Reverse Recovery Time (Note 1) | T _{rr} | 35 | | | | | | | | nS |
| Typical Junction Capacitance (Note 2) | C _j | 80 | | | | 70 | | | | pF |
| Typical Thermal resistance | R _{θJA} | 35 | | | | | | | | °C/W |
| Operating Temperature Range | T _J | -65 to +125 | | | | | | | | °C |
| Storage Temperature Range | T _{STG} | -65 to +150 | | | | | | | | °C |

- Notes:
1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$
 2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.
 3. Mount on Cu-Pad Size 16mm x 16mm on PCB.

RATINGS AND CHARACTERISTIC CURVES (SF31 THRU SF38)

FIG.1- MAXIMUM AVERAGE FORWARD CURRENT DERATING

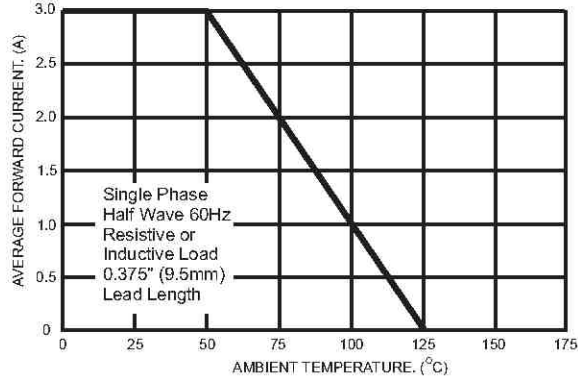


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

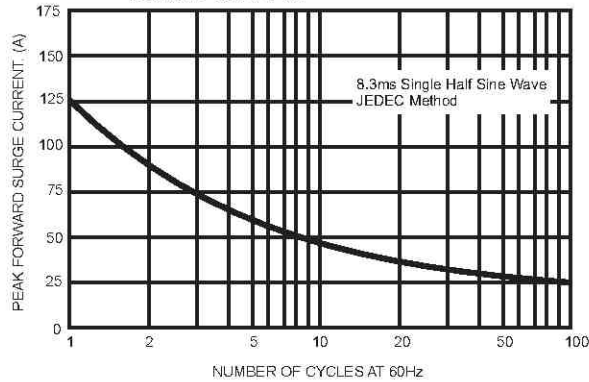


FIG.4- TYPICAL JUNCTION CAPACITANCE

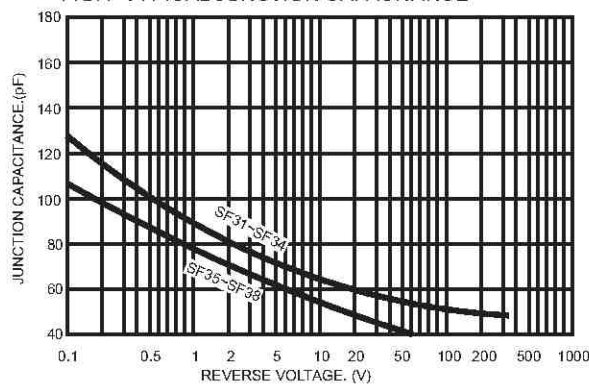


FIG.2- TYPICAL REVERSE CHARACTERISTICS

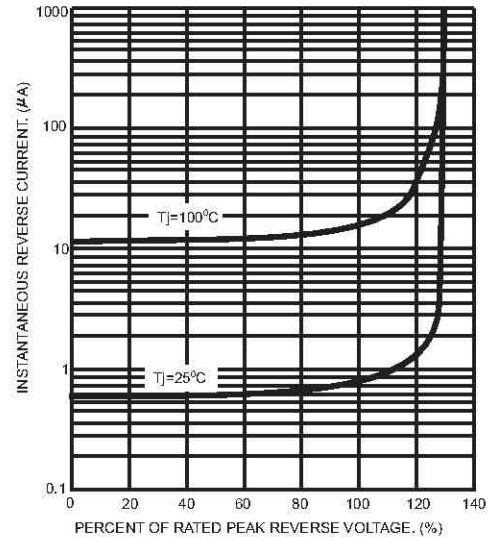


FIG.5- TYPICAL FORWARD CHARACTERISTICS

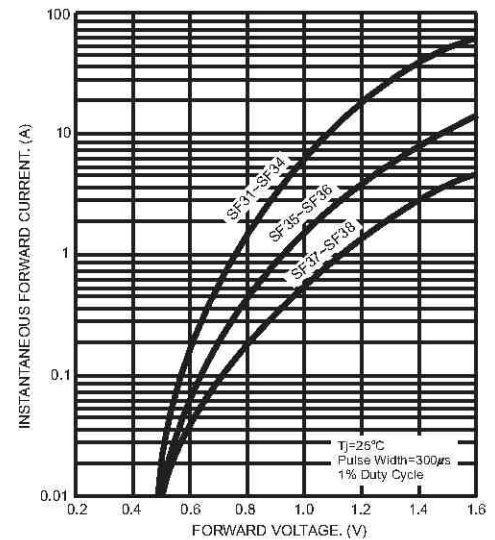


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

