



107 series

D-SUB RIGHT ANGLE TYPE (7.2mm 9.4mm 13.84mm)

Position	A	B	C	D
9	17.78	24.99	31.04	16.33
15	26.15	33.32	39.24	24.66
25	39.94	47.04	53.04	38.66
37	56.56	63.50	69.62	54.84

	E	F	G
B	7.2	18.4	9.62
D	9.4	20.64	12.06
C	13.84	25.3	16.5

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
Insulator Resistance: 1000M Ω min.at DC 500V
Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55° C--+105° C
Contact: Brass or Phosphor Bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

How To Order

107 - 15 S T K A B
1 2 3 4 5 6 7

SERIES NO

NO.OF PINS:
09,15,25,37.

CONTACT TYPE
P-MALE
S-FEMALE


SHELL PLATED:
C-CHROMATED SHELL
T-TIN SHELL

B-7.2mm FOOTPRINT
D-9.4mm FOOTPRINT
C-13.84mm FOOTPRINT


MOUNTING TYPE:
A-A TYPE,WITH JACK SCREW & BOARD LOCKS
K-K TYPE,WITH 4-40 INSERT & BOARD LOCKS

OPTION ON INSULATOR:
B-BLUE
K-BLACK
W-WHITE

[MALE]

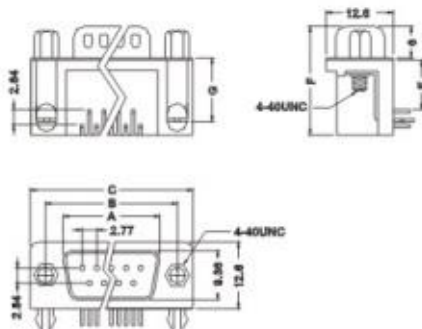

[FEMALE]

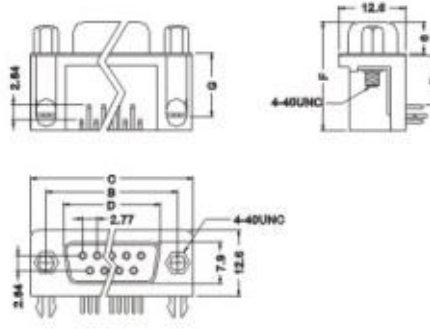

D-SUB CONNECTORS RIGHT ANGLE MOUNTING OPTIONS

