序号/RevNo.	名称/Title	文件编号/File No.

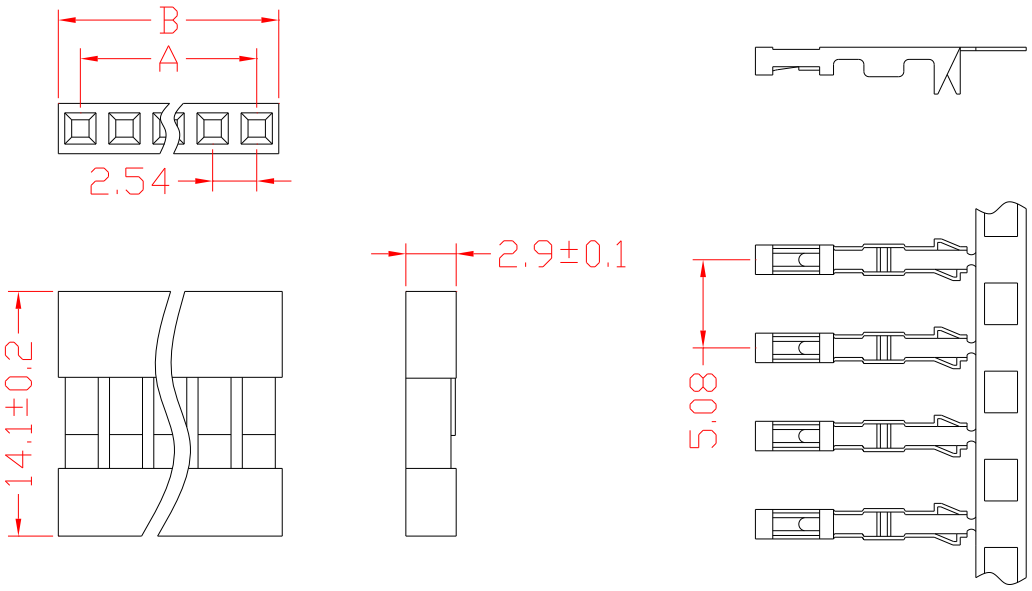

Specifications:
Contact Resistance: 100mΩ max.
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 3AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-25°C--+85°C
Contact: Phosphor Bronze
Housing: Nylon UL 94V-0

Position	2 Thru 32
A	2.54*Position NO.-2.54
B	2.54*Position NO.

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 .x ±0.1 .xx ±0.05 .xxx ±0.01 x.° ±2° .x° ±1° .xx°±0.5°
M&E 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title: 130A(单排)产品图	文件编号/File No.: QJ/XYT-12061	
		备注/Remark	页序/Sheet	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

序号/RevNo.	名称/Title	文件编号/File No.

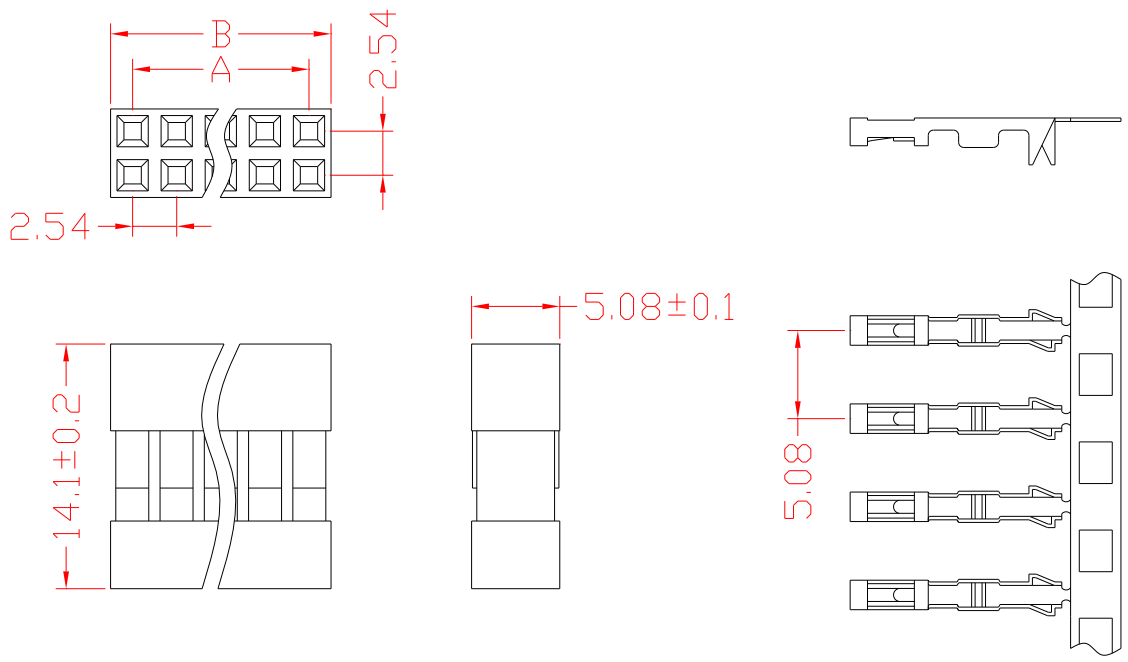

Specifications:
Contact Resistance: 100mΩ max.
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 3AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-25°C--+85°C
Contact: Phosphor Bronze
Housing: Nylon UL 94V-0

Dimension	4 thru 64
A	2.54*Position NO./2-2.54
B	2.54*Position NO./2

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. ±0.2 .x ±0.1 .xx ±0.05 .xxx ±0.01 x.° ±2° .x° ±1° .xx°±0.5°
M&E 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title: 130A(双排)产品图	文件编号/File No.: QJ/XYT-12062	
		备注/Remark	页序/Sheet	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date